

# HIT<sup>®</sup> photovoltaic module



HIT-H250E01  
HIT-H245E01

NE

**R&D  
technology  
adaptation**

**Reduction of carrier recombination loss**  
 -Preserving as much of the generated electricity as possible  
 -Realizing even higher voltage

**Use resources effectively**

-By cutting the wafer almost round the HD cell produces less waste of material  
 -Compact module size but highest electric generation

**HD  
cell  
design**

**Anti-  
reflection  
glass**

**Reduction of optical loss**  
 -Enabling as much incoming sunlight as possible to reach the electrical generating layer (crystalline silicon)  
 -Realizing even higher current



18.0%\*

180 W/m<sup>2</sup>

\* For HIT-H250E01

## HIT cell technology

The SANYO HIT(Heterojunction with Intrinsic Thin layer) solar cell is made of a thin mono crystalline silicon wafer surrounded by ultra-thin amorphous silicon layers. This product provides the industry's leading performance and value using state-of-the-art manufacturing techniques.

## Special Features


**More Clean Energy**  
HIT can generate more clean Energy than other conventional crystalline solar cells.

## Environmentally-Friendly Solar Cell

SANYO HIT solar modules are 100% emission free, have no moving parts and produce no noise. The dimensions of the HIT modules allow space-saving installation and achievement of maximum output power possible on given roof area.

## High performance at high temperatures

Even at high temperatures, the HIT solar cell can maintain higher efficiency than a conventional crystalline silicon solar cell.

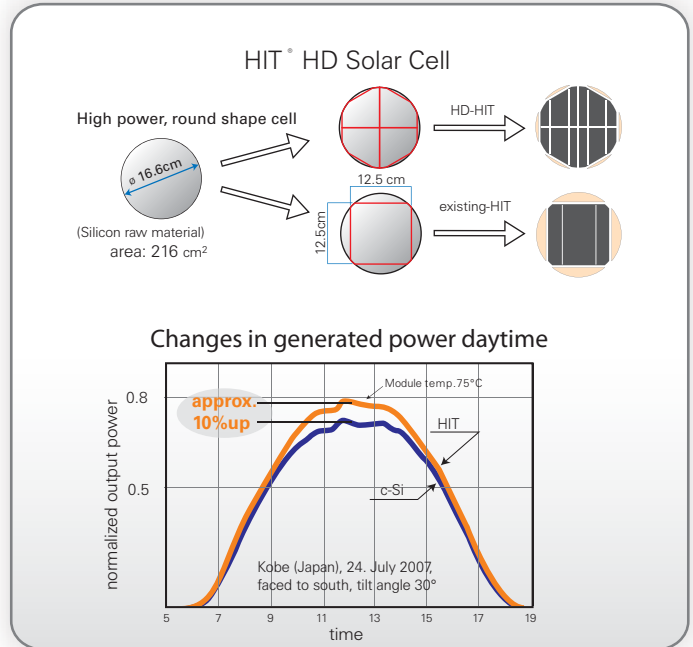

The HIT cell and module have very high conversion efficiency in mass production.




Model	Cell Efficiency	Module Efficiency	Output / m <sup>2</sup>
HIT-H250E01	20.8%	18.0%	180 W/m <sup>2</sup>
HIT-H245E01	20.4%	17.7%	177 W/m <sup>2</sup>

HIT is a registered trademark of SANYO Electric Co., Ltd. The name "HIT" comes from "Heterojunction with intrinsic Thin-layer" which is an original technology of SANYO Electric Co., Ltd.

EN

Electrical data (at STC)	Models HIT-HxxxE01	
	250	245
Maximum power (Pmax) [W]	250	245
Max. power voltage (Vmp) [V]	34.9	34.4
Max. power current (Imp) [A]	7.18	7.14
Open circuit voltage (Voc) [V]	43.1	42.7
Short circuit current (Isc) [A]	7.74	7.73
Maximum over current rating [A]	15	
Output power tolerance [%]	+10/-5*	
Maximum system voltage [V]	1000	
Note: Standard Test Conditions: Air mass 1.5, Irradiance = 1000W/m <sup>2</sup> , cell temperature = 25°C		
<b>Temperature characteristics</b>		
Temperature (NOCT) [°C]	46.0	46.0
Temperature coefficient of Pmax [%/°C]	-0.30	-0.30
Temperature coefficient of Voc [V/°C]	-0.108	-0.107
Temperature coefficient of Isc [mA/°C]	2.32	2.32
<b>At NOCT</b>		
Maximum power (Pmax) [W]	188.9	185.4
Max. power voltage (Vmp) [V]	32.8	32.4
Max. power current (Imp) [A]	5.76	5.73
Open circuit voltage (Voc) [V]	40.5	40.1
Short circuit current (Isc) [A]	6.23	6.23
Note: Nominal Operating Cell Temperature: Air mass 1.5 spectrum, Irradiance = 800W/m <sup>2</sup> , Air temperature = 20°C, wind speed 1 m/s		
<b>At low irradiance</b>		
Maximum power (Pmax) [W]	48.8	47.7
Max. power voltage (Vmp) [V]	34.1	33.6
Max. power current (Imp) [A]	1.43	1.43
Open circuit voltage (Voc) [V]	40.1	39.7
Short circuit current (Isc) [A]	1.55	1.55
Note: Low irradiance: Air mass 1.5 spectrum, Irradiance = 200W/m <sup>2</sup> , cell temperature = 25°C		

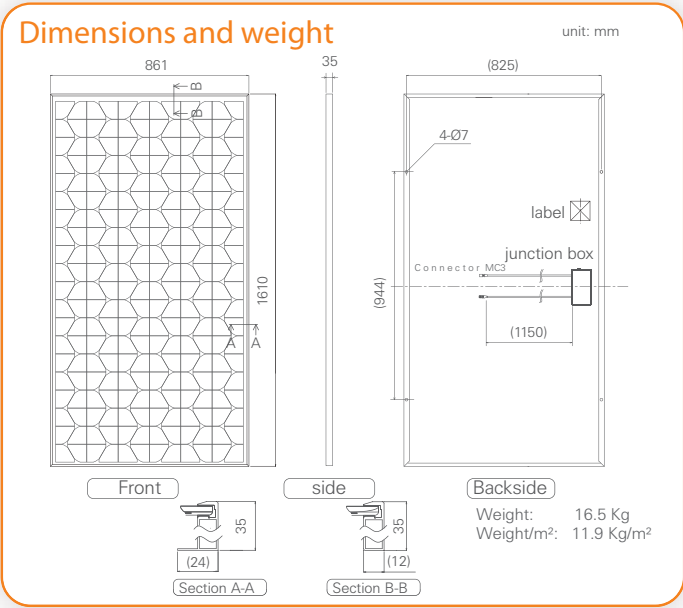

### Guarantee

Power output: 10 years (90% of Pmin) 25 years (80% of Pmin)  
 Product workmanship: 5 years  
 (Based on guarantee documents)

### Materials

Cell material: Honeycomb Design HIT cells  
 Glass material: AR coated tempered glass  
 Frame materials: Black anodized aluminium  
 Connector type: MC3

### Certificates

• Safety tested, IEC 61730  
 • Periodic inspection


IEC 61730  
 IEC 61215

CE

### Member of

Electrical Protection Class II

Certificate No. MCS PV0034 Photovoltaic System

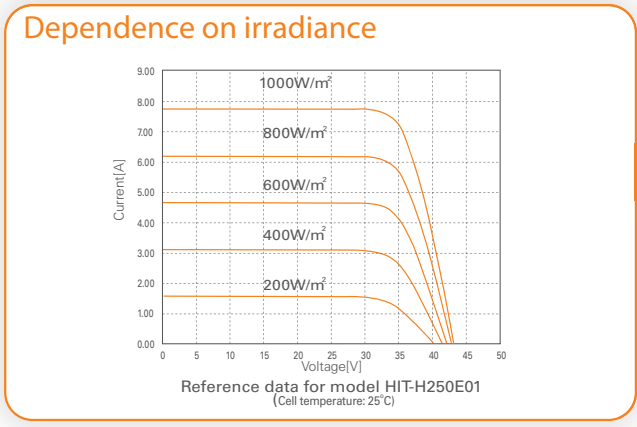

Please consult your local dealer for more information.

**CAUTION!** Please read the installation manual carefully before using the products.  
 Due to our policy of continual improvement the products covered by this brochure may be changed without notice.